

Busy lab days, but
you're equipped for
success.

You are passionate
for science.

EQUIPMENT BROCHURE

Starlab laboratory equipment.

Passionate for science.



WATCH VIDEO

Passionate for Science.
Starlab inspires and supports
you in the selection of your
equipment for your lab.



Equip yourself for success in the lab.

STARLAB: MORE THAN JUST TIPS

Starlab are liquid handling experts. We have become a recognised name as a manufacturer and supplier of high quality plastic consumables for a wide range of applications in liquid handling, such as the TipOne® pipette tip system and ErgoOne® pipettes.

Our laboratory equipment carries on the tradition of quality, with a range of products designed to help you with a variety of laboratory applications. Our equipment is designed to be

- Robust
- Reliable
- Easy to use
- Easy to maintain

Starlab laboratory equipment is designed for repeated daily use for a range of laboratory applications. User convenience, great features and a small footprint is at the heart of our design process.

Discover our range, and equip yourself for success in the lab.



Contents

OUR HIGHLIGHTS

GuardOne®	4 – 5
Vortex Mixer	6 – 7
Minicentrifuge	8 – 9

ASPIRATOR	10 – 11
-----------------	---------

CENTRIFUGE

Plate Centrifuge	12
------------------------	----

MIXERS

Rotator Mixer.....	13
Microplate Mixer	14
Tube Roller	15

SHAKERS

Orbital Shaker	16
Rocking Shaker	17
3D Rocking Shaker	17

STIRRERS

Magnetic Stirrer	18
Magnetic Stirrer with heating	19

TIMER

Four-Channel Timer/Clock.....	20
-------------------------------	----


UNDERBENCH FREEZER

-86° Underbench Freezer.....	21
------------------------------	----

PIPETTES

The ErgoOne® pipette family	22 – 23
-----------------------------------	---------

GuardOne® Workstations.

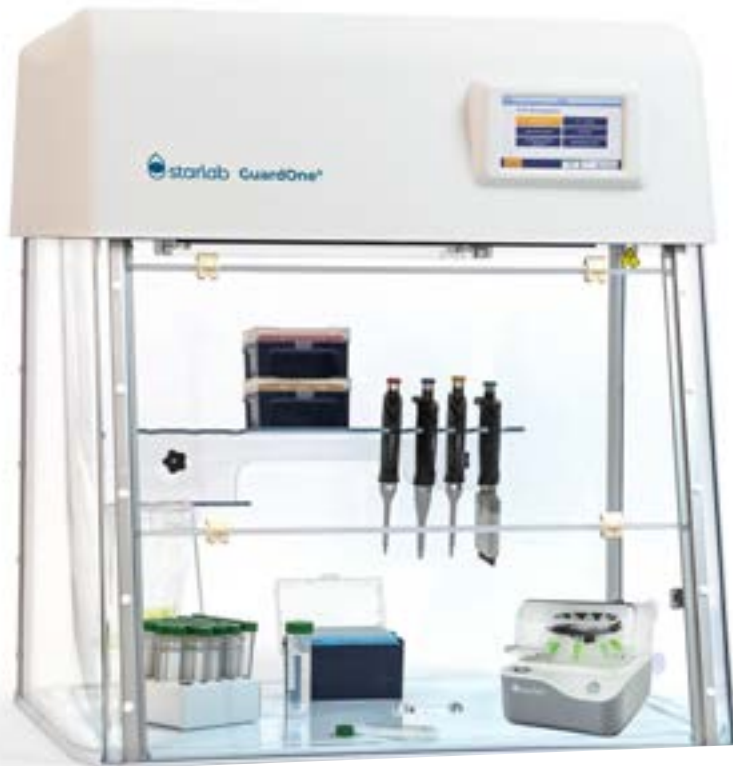

ALL IN FOR YOUR APPLICATIONS

Starlab's GuardOne® Workstation provides the ideal workspace for sensitive and critical applications requiring a clean environment or protection from potential contamination by bacteria, DNA or RNA. The GuardOne® Workstation minimizes cross-contamination risk to protect your valuable samples and reagents*, thus helping to prevent both the time and cost involved by having to duplicate contaminated work.

Every aspect of GuardOne® has been designed with convenience in mind. All functions are controlled via the glove compatible, easy to use touchscreen.

Smart design! Minimal volume packaging with easy assembly in just 15 minutes. HEPA filter exchange and UV lamp exchange in just 2 minutes.

*GuardOne® is not designed to protect the operator.

Glove compatible, easy to use touchscreen which also features an at-a-glance, colour-coded workstation status indicator



Easy open lid with hydraulic struts for effortless HEPA filter exchange



High-performance energy-saving LED lights (white and red)



Optically clear, UV-impermeable polycarbonate for maximum visibility



Convenient cable access for your electrical devices



WATCH VIDEO



- One-touch QuickStart / QuickStop settings
- Efficient UV_{245 nm} decontamination with timer function
- Efficient, class H14 HEPA filter with pre-filter provides ISO class 5 working environment*
- Real-time airflow measurement*
- Life-span monitoring of consumables
- Virtually maintenance-free
- Easy to clean
- Easy, tool-free assembly in just 15 minutes

*Laminar flow models only.



	Dead Air Workstation 32"	Dead Air Workstation 48"	Laminar Flow Workstation 32"	Laminar Flow Workstation 48"
Ordering Information				
Article No.	S8040-1000	S8040-1001	S8040-0000	S8040-0001
Technical Specifications				
BASIC SPECIFICATIONS				
External dimensions (W x D x H)	813 x 610 x 877 mm	1220 x 610 x 877 mm	813 x 610 x 877 mm	1220 x 610 x 877 mm
Internal dimensions (W x D x H)	800 x 600 x 600 mm	1200 x 600 x 600 mm	800 x 600 x 600 mm	1200 x 600 x 600 mm
Weight	32 kg	35 kg	36 kg	42 kg
Power consumption	38 W	38 W	90 W	160 W
Lab timer	Yes	Yes	Yes	Yes
AIR FLOW				
Air velocity	-	-	0.2 – 0.4 m/s	0.2 – 0.4 m/s
Realtime airflow measuring	-	-	Yes	Yes
Pre-filter	-	-	1x	2x
HEPA filter	-	-	1x H14	2x H14
HEPA filter lifespan monitor	-	-	yes	yes
LIGHT				
LED light intensity	1400 lux	1400 lux	1400 lux	1400 lux
UV lamp	1x 15 W	2x 15 W	1x 15 W	2x 15 W
UV lamp lifespan monitor	Yes	Yes	Yes	Yes
UV timer	Yes	Yes	Yes	Yes
UV safety switch	Yes	Yes	Yes	Yes
Go online for more information, videos and ordering details on replacement lamps, filters & accessories				



Vortex Mixer.

Great features. Good vibrations.

THE STARLAB VORTEX MIXER

With its compact and stylish design, the Starlab Vortex Mixer is the perfect bench partner for your lab. The unique touchscreen provides precise speed settings for the gentle mixing of samples right up to vigorous vortex mixing and the resuspending of cells or chemical pellets.

- Glove compatible touch screen
- Precise vortexing speeds, from 300 to 3,500 rpm
- One-touch pre-set options for speed / time
- Touch or continuous operation
- End of run audible alarm
- Power-saving sleep mode
- Optional accessories



WATCH VIDEO

ANTI-SLIP FEET

provide stability on the bench during mixing

TOUCH MODE

Minimal pressure required to maintain vibration. Mix single or multiple tubes up to 3,500 rpm

SPEED RANGE
300 – 3,500 RPM

GLOVE COMPATIBLE TOUCHSCREEN
for precise speed and time settings

POWER-SAVING SLEEP MODE

SMOOTH, QUIET OPERATION



Subscribe to the vibe.

OPTIONAL ACCESSORIES



Adapter for microplates

Mix one plate with a SBS/SLAS footprint with speeds up to 1,500 rpm



Adapter for 1.5/2.0 ml tubes

Mix up to 15 tubes at the same time with speeds up to 1,500 rpm

ORDER INFO & TECHNICAL SPECIFICATIONS

Description	Article No.
 Vortex Mixer ¹⁾	S8010-0000
Accessories	
 Replacement Standard Attachment	S8010-0010
 Adapter for 1.5 / 2.0 ml tubes	S8010-0011
 Adapter for microplates	S8010-0012
 Replacement power adapter with four exchangeable plugs, 24 V, 1 A for EU, UK, US & AUS	S8010-5012

¹⁾ Vortex Mixer is supplied with one standard attachment and a power adapter with four exchangeable plugs.
2-year warranty.

Technical specifications	
Speed range	Standard attachment: 300 to 3,500 rpm Adapter for 1.5/2.0 ml tubes: 300 to 1,500 rpm Adapter for microplates: 300 to 1,500 rpm
Speed increments	50 rpm
Timing capacity	1 second to 99:59 minutes
Type of movement	Orbital
Operation modes	Two: touch and continuous
Noise level	≤ 55 dBA
USB output	5 VDC 1 A
Permissible ambient temperature	2 °C – 40 °C
Permissible relative humidity	≤ 80 %
Power supply	100 – 240 V, 50 Hz – 60 Hz
Unit input	24 V DC 12 W
Weight	≤ 2.8 kg
Dimensions (W x D x H)	200 x 130 x 103 mm

 starlab.click/shop-vortex







The Minicentrifuge

SMOOTH OPERATOR

This is a compact and solid unit that delivers a quiet, smooth operation and unique features. It's so easy to use.

Just load your samples, close the lid and you're spinning.

The one-touch STOP provides fast braking and opens the lid at the same time for a seamless, one-handed operation.

Description	Article No.
 Minicentrifuge ¹⁾	S8030-5000
Accessories	
 Tube rotor for 8 x 1.5 / 2.0 ml tubes	S8030-5010
 PCR strip rotor for 32 x 0.2 ml PCR tubes or 4 x 8 PCR tube strips	S8030-5011
 Power adapter with four exchangeable plugs, 24 V, 1 A for EU, UK, US & AUS	S8030-5012
 Tube rotor adapters for 0.5 ml tubes, pack of 8	S8030-5013
 Tube rotor adapters for 0.2 ml tubes, pack of 8	S8030-5014

¹⁾ Supplied with power adapter and four exchangeable plugs, 1 x tube rotor, 1 x PCR strip rotor and one pack of 0.5 ml adapters and one pack of 0.2 ml adapters.

MAGNETIC LID LOCK

aids easy, one-handed operation



OH SO QUIET
noise level 55 dBA

TOOL FREE
quick and easy
rotor exchange

ONE-TOUCH STOP for fast
braking and
lid release

QUICK START
just close the lid
to start spinning!

Technical specifications

Maximum speed	6,500 rpm \pm 1 %
Maximum g-force	2,500 \times g
Noise level	55 dBA
Permissible ambient temperature	2 °C – 40 °C
Permissible relative humidity	\leq 80 %
Power supply	100 – 240 V, 50 Hz – 60 Hz
Unit input	24 V DC 12 W
Weight	< 1.2 kg
Dimensions (W x D x H)	160 x 130 x 112 mm



WATCH VIDEO



starlab.click/minicentrifuge

A perfect fit for your **daily use.**


TURN UP, SPIN DOWN

The Starlab Minicentrifuge is your ideal personal partner for the quick spin down of condensate, vortexed or thawed samples. It is intended for applications requiring relatively low centrifugal forces, such as microfiltration, cell separation and quick spin downs from microcentrifuge tube walls and caps.



TUBE ROTOR


- Max. speed: $2,500 \times g$ (6,500 rpm)
- Max. capacity: $8 \times 1.5/2.0$ ml tubes
- Adapters for 0.2 ml and 0.5 ml tubes



PCR STRIP ROTOR

- Max. speed: $2,500 \times g$ (6,500 rpm)
- Max. capacity: $4 \times$ PCR strips or 32×0.2 ml PCR tubes

Rotor specifications				
Rotor type	Max. capacity	Max. tube length	Max. tube diameter	Example tube type
Tube Rotor	8 tubes	45 mm	11 mm	1.5/2.0 ml microcentrifuge tubes. 0.5 ml Skirted Screw Cap Microtubes. 1.5/2.0 ml Skirted/Non-Skirted Screw Cap Microtubes
Tube Rotor, with 0.2 ml adapters	8 tubes	19 mm	6.0 mm	0.2 ml PCR tubes
Tube Rotor, with 0.5 ml adapters	8 tubes	45 mm	8.0 mm	0.5 ml PCR or microcentrifuge tubes
PCR Rotor	4×8 -strips or $32 \times$ singles	35 mm	6.0 mm	0.2 ml PCR strips or single tubes



The Tube Rotor holds up to eight microcentrifuge tubes ...



... or up to eight conical or skirted screw cap microtubes.



The PCR Strip Rotor holds up to four 0.2 ml 8-tube PCR strips ...



... or up to 32 single 0.2 ml PCR tubes.

Aspirator.



USE TWO HAND CONTROLLERS WITHOUT ANY LOSS OF PERFORMANCE

The Starlab Aspirator is designed for the safe and efficient aspiration of fluids. The vacuum level and suction power is adjustable in eight steps (150 to 850 mbar) for safe and reproducible working.

The chemically-resistant pump automatically switches on/off to reduce noise level in the workplace. The ergonomically-designed hand controller is fully autoclavable. Collection containers are available in two options; 4 L polypropylene and 2 L glass bottles. You can also use the Aspirator as a mobile vacuum source for sterile filtration and solid phase extraction.



Easy to handle

Pressing the lever allows fine adjustment of the suction power. Permanent suction can also be enabled.



8-channel tip adapter

The 8-channel adapter for 200 µl and 300 µl pipette tips is the perfect choice for working with cell culture plates.



Hydrophobic filter

Hydrophobic filter prevents contamination of environment and provides overfill protection.



Quick coupling

Autoclavable, self-sealing quick coupling allows safe decontamination of biological risks.

- The powerful pump can operate two hand controllers without any loss of performance
- Chemically-resistant, high performance pump with long service life
- Auto ON-OFF pump switch with low noise emission for a quieter working environment
- Ergonomic, fully autoclavable hand controller
- Intuitive, reproducible adjustment of suction power via touch panel

Technical specifications

Maximum pumping speed	16.7 l/min
Adjustable range of vacuum	150 – 850 mbar
Maximum permissible inlet/outlet pressure	1.1 bar
Noise level	45 dB(A)
Permissible ambient temperature	10 – 40 °C
Permissible relative humidity	38 – 85 %
Maximum power consumption	40 W
Power supply	230 V + 10 %, 50/60 Hz
Weight	7.3 kg
Dimensions (W × D × H)	408 x 194 x 500 mm

THE IMPORTANCE OF ACCESSORIES! HERE'S A GUIDE OF WHAT TO BUY.

To add an exchange bottle:

N2400-9010 (fast coupling N2400-9008 also recommended)

To have a self-sealing system applicable for biological risks:

N2400-9008 plus N2400-9009

N2400-9000¹⁾ includes everything you need to get started: Aspirator, 4 Litre Polypropylene Bottle with Protection Filter and Inlet Pipe, Hand Controller, including 2.5 m Tubing, a Wall Mount, an Adapter for Pipettes, and an Adapter for Pipette Tips.

[WATCH VIDEO](#)

To have a benchtop stand for your Hand Controller:

N2400-9004

To have a fast coupling system:

N2400-9008 plus N2400-9009.

To use stronger chemicals (eg. sodium hypochlorite) or staining solutions:

N2400-9012 plus N2400-9013

To work with cell culture plates:

N2400-9003

To add a second Hand Controller:

N2400-9001 plus N2400-9006 or N2400-9008

[WATCH VIDEO](#)

To have easy access to your under bench Aspirator

N2400-9014



Description

Art. No.



Aspirator

N2400-9000

¹⁾ Aspirator is supplied with everything you need to get started. 1-year warranty.



starlab.click/aspirator

Accessories



Hand Controller for Aspirator.
Includes one Adapter for Pipettes, one Adapter for Pipette Tips, a Wall Mount, and 2.5 m Tubing.

N2400-9001



8-Channel Tip Adapter for Hand Controller

N2400-9003



Stand for Hand Controller

N2400-9004



Tubing for Hand Controller (2.5 m)

N2400-9005



Connection Kit for Second Hand Controller

N2400-9006



Protection Filter with Connective Tubing

N2400-9007



Quick Coupling: Hand Controller to Bottle

N2400-9008



Quick Coupling: Bottle to Pump

N2400-9009



4 Litre Polypropylene Bottle with Filter and Inlet Pipe

N2400-9010



4 Litre Polypropylene Bottle with Screw Cap

N2400-9011



2 Litre Glass Bottle with Filter and Inlet Pipe

N2400-9012



Adapter for 2 Litre Glass Bottle

N2400-9013



Mobile Underframe

N2400-9014



Tool for Diaphragm Change

N2400-9015



Adapter for Pipettes

N2400-9016

Plate Centrifuge.



- Holds two plates
- Use with non-skirted, semi-skirted and skirted 96- and 384-well plates
- 2,500 rpm
- Two operating modes
- End of timed run audible alarm
- Starts / stops in seconds
- Convenient small footprint
- Optional adapter available for half plates or tubes

GET SPINNING. IMPROVE PCR YIELDS.

Starlab's innovative Plate Centrifuge is tailored for the rapid and effortless centrifugation of samples in PCR plates. Use before and after thermal cycling to enhance your yield.

CONVENIENT, TIME SAVING

Now you can stop taking plates to the big centrifuge at the other end of the lab, and having to wait for it to unlock. This plate centrifuge can sit on your bench and will spin your plates in seconds.

FAST LOADING

Holds two PCR plates. Load the sealed plates vertically into the top slots.

TWO OPERATING MODES

SHORT: Use for short spins. Press and hold to run at maximum speed. The timer will count up. Release the button to stop centrifuging

TIMER: For longer centrifugation or hands-free operation, set a duration. Centrifuging will stop when the set time has elapsed.

TECHNICAL SPECIFICATIONS

Capacity	2 x 96-/384-well PCR plates. Maximum plate height: 25 mm
Maximum speed	2,500 rpm $\pm 10\%$
Maximum RCF	500 x g
Temperature range	5° C to 40° C (up to 80% RH at 31° C, decreasing linearly to 50% RH at 40° C)
Timer capacity	0–99 seconds / 0–99 minutes
Noise level	51 dB ¹⁾
Power adapter operating voltage	100 to 240 V~, 50 to 60 Hz, 1.5A
Unit input	24 VDC 45 W
Protection class	IP21
Weight	2.6 kg
Dimensions	190 x 220 x 186 mm

¹⁾ Operation noise level, excluding timer alarm

ORDERING INFORMATION



Plate Centrifuge¹⁾

N2631-0100



Plate Centrifuge Adapter
for use with 0.2 ml PCR tubes
& PCR strips, and 48-well
PCR Plates

N2631-0018

¹⁾ 2-year warranty.



starlab.click/platecentrifuge

Rotator Mixer Multi 1.



- Controlled sample inverting
- Programmable
- Three different motions
- Variable speed and timer
- Low profile and small footprint

IT'S GIVING OUT GOOD VIBRATIONS

Compact and multifunctional, the programmable Rotator Mixer provides the thorough mixing of microtubes with consistent results. The three different motions – vertical rotation, reciprocal motion and vibration – can be used separately or combined, as well as variable speed and timer functions. Supplied with a platform for 26 tubes up to 15 mm diameter (eg. 1.5/2.0 ml and 15 ml tubes), Starlab's Rotator Mixer will aid your daily mixing tasks. An optional platform is available separately. The Rotator Mixer is designed for mixing applications including cell suspensions, incubations, extraction procedures, gel washing and precipitations.



Vertical Rotation
360° vertical motion for time period of 0–250 seconds, or non-stop.






Reciprocal Motion
Platform direction changes in turns (turning angle 1–90°) for 0–250 seconds, or non-stop.



Vibration
Platform direction changes in turns (see reciprocal motion) plus additional vibration (turning angle 1–5° for 1–5 seconds.



Pause
Platform direction changes in turns, incl. a temporary motion stop of 1–5 seconds (in conjunction with reciprocal motion only).

Description	Art. No.
 Rotator Mixer Multi 1	N2400-5000
Accessories	
 Platform for 5 x 50 ml & 12 x 5.0 to 15 ml Tubes	N2400-5103
 Platform for 26 Tubes up to 15 mm diameter	N2400-5104
N2400-5000 is supplied with platform N2400-5104. 2-year warranty.	

Technical specifications	
Speed range	1 – 100 rpm
Speed increments	1 rpm
Timing capacity	Auto switch-off: 1 min. – 24 hrs. Vertical or Reciprocal Mode: 0 – 250 seconds, or non-stop. Vibration mode: 0 – 5 secs
Maximum load	0.5 kg
Permissible ambient temperature	4 – 40 °C
Output	1.25 A
Weight	1.8 kg
Dimensions (W x D x H)	365 x 195 x 155 mm


 starlab.click/rotatormixer

Microplate Mixer.

MIX IT. SHAKE IT.

Ideal for the mixing and shaking of any skirted plate (PCR, Cell Culture, Deepwell, Microtiter and Microplates), the Starlab microplate mixer can hold either one or two plates, depending on the attachment being used. Versatile too! You can also mix tubes with the special tube adapter accessories. The step-less, variable vibration speed is excellent for applications such as the resuspending pellets.

- Suitable for use with all skirted plates with a SBS footprint
- Wide speed range: 0 to 1500 rpm
- Step-less speed control
- Various accessories for microtitre plates and tubes
- Small footprint

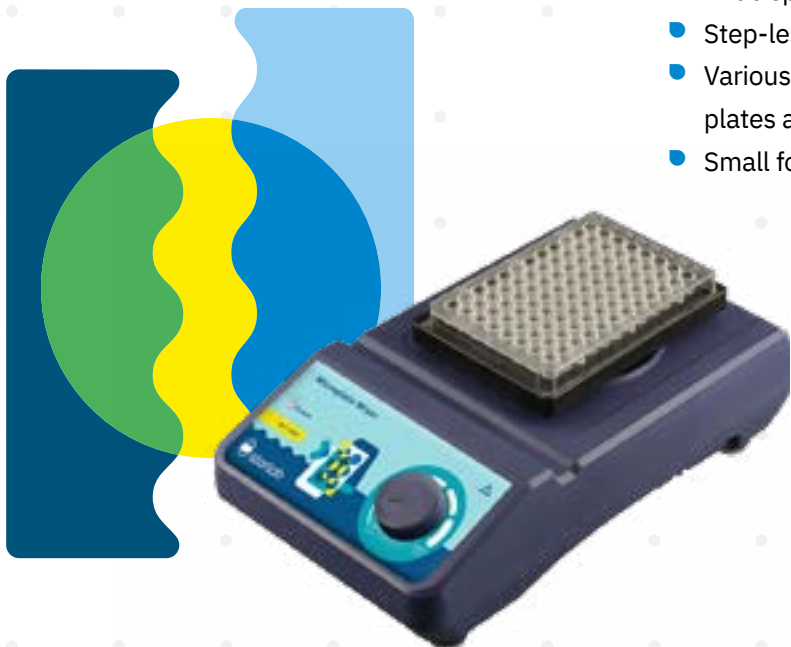

 starlab.click/microplate-mixer

Description	Art. No.
 Microplate Mixer ¹⁾	N2400-8040
Accessories	
 Attachment for One Microtiter Plate ²⁾	N2400-8041
 Attachment for Two Microtiter Plates ²⁾	N2400-8042
 Tube Adapter for 15 x 1.5 / 2.0 ml Tubes ³⁾	N2400-6012
 Tube Adapter for 8 x 15 ml Centrifuge Tubes ³⁾	N2400-6013
 Microplate Mixer Adapter Plate	N2400-8043

¹⁾ N2400-8040 is supplied with attachment N2400-8041. ²⁾ N2400-8041 and N2400-8042 are suitable for use with all skirted plates with a SBS footprint (127.8 x 85.5 mm).

³⁾ N2400-6012 and N2400-6013 can only be used on this mixer in conjunction with the Adapter Plate N2400-8043. 2-year warranty.

Technical specifications	
Speed range	0 – 1500 rpm ¹
Type of movement	Orbital
Orbital diameter	4.5 mm
Maximum load	0.5 kg
Permissible ambient temperature	4 – 40 °C
Permissible relative humidity	< 80 %
Maximum power consumption	20 W
Power supply	100 – 240 V, 50/60 Hz
Weight	3.0 kg
Dimensions (W x D x H)	150 x 260 x 80 mm


¹ 1500 rpm is maximum speed with all attachments, except N2400-8042 which has a maximum speed of 1000 rpm.

Tube Roller.

IT'S A ROCK AND ROLL STAR

Simultaneous rolling and tilting movements ensures thorough mixing of your samples. The unit features variable speed control and a sturdy and robust construction. The tube roller is built for continuous operation and is suitable for applications such as hybridisation.

- Simultaneous rolling and tilting motion
- Continuous operation
- Speed control up to 70 rpm
- Six rollers holds load up to 4 kg
- Easy to use

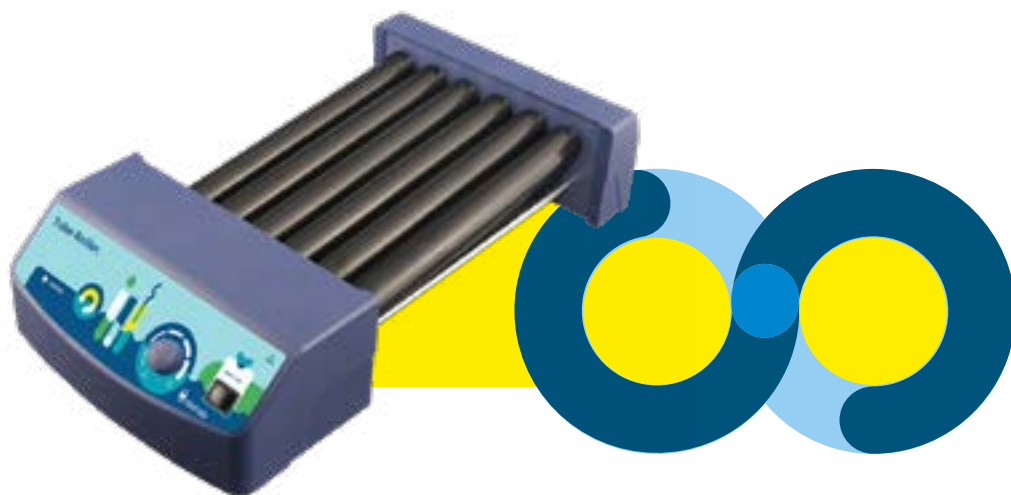


Description	Art. No.
 Tube Roller	N2400-7010
2-year warranty.	

Technical specifications	
Speed range	0 – 70 rpm
Type of movement	Orbital
Number of rollers	6
Size of rollers	280 x 30 mm
Maximum load	4.0 kg
Permissible ambient temperature	4 – 40 °C
Permissible relative humidity	< 80 %
Maximum power consumption	25 W
Power supply	100 – 240 V, 50/60 Hz
Weight	4.5 kg
Dimensions (W x D x H)	260 x 460 x 120 mm

 starlab.click/tuberoller

Orbital Shaker.

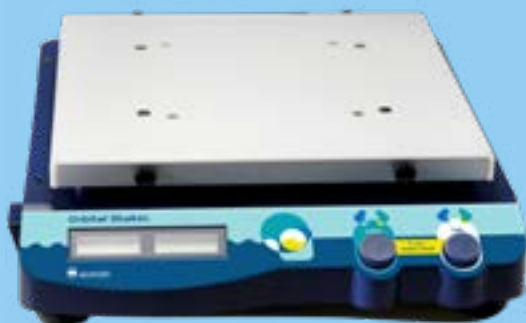

- Provides gentle agitation up to vigorous orbital motion
- Two operating modes: continuous and timer
- LCD displays for speed and time
- Holds load up to 7.5 kg
- Choice of two platforms




SHAKE IT ALL ABOUT

With two operating modes – continuous and timer – orbital shaking of your samples is possible from a gentle agitation up to a vigorous orbital motion. The easy to read, digital speed and timer displays ensures ease of use in the busy lab environment. The orbital shaker is suitable for a wide range of molecular biology or immunology applications.

The Orbital Shaker is NOT supplied with a platform. Two platforms are available and sold separately so you can order your shaker to suit your requirements.



Orbital Shaker.
Image shows N2400-8030 with platform N2400-8011 (sold separately).

Description	Art. No.
 Orbital Shaker (without platform)	N2400-8030
Accessories	
 Universal Platform with Clamping Rolls	N2400-8011
 Universal Platform with Rubber Mat and Bungee Cords	N2400-8021

N2400-8030 is not supplied with platform. A platform must be purchased separately. Platforms N2400-8011 and N2400-8021 can also be used on the Starlab Rocking Shaker (N2400-8010) and Stalab 3D Rocker Shaker (N2400-8020). 2-year warranty.


Technical specifications	
Speed range	100 – 500 rpm
Type of movement	Orbital
Orbital diameter	10 mm
Maximum load	7.5 kg
Platform dimensions	300 x 300 mm
Operation	Two: continuous or timer
Timing capacity	1 – 1199 mins (19 hrs 59 secs)
Display	LCD
RS232 interface	Yes
Permissible ambient temperature	4 – 40 °C
Permissible relative humidity	< 80 %
Maximum power consumption	30 W
Power supply	100 – 240 V, 50/60 Hz
Weight	13.5 kg
Dimensions (W x D x H)	420 x 370 x 100 mm

 starlab.click/orbitalshaker

3D Rocking & Rocking Shakers.



 starlab.click/shakers

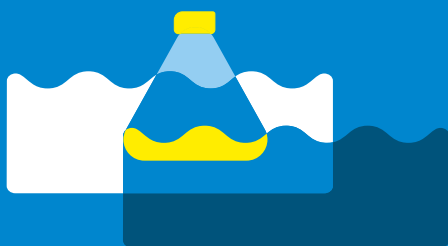

SHAKEN, NOT STIRRED

Two similar shakers but with different movements: 3D or see-saw rocking. Both shakers have a fixed tilt angle and provide two shaking modes: continuous and timer. The digital speed and timer displays ensure ease of use. Both shakers are supplied with a platform with a rubber mat and bungee cords. An alternative platform with clamping rolls is available separately, making these shakers suitable for a wide range of applications including blotting, cultivation and incubation techniques.

- See-saw rocking or 3D mixing
- Two operating modes: continuous and timer
- LCD displays for speed and time
- Easy to use
- Alternative platform available

Description	Art. No.
 3D Rocking Shaker	N2400-8020
 Rocking Shaker	N2400-8010
Accessories	
 Universal Platform with Clamping Rolls	N2400-8011
 Universal Platform with Rubber Mat and Bungee Cords	N2400-8021

N2400-8020 and N2400-8010 are both supplied with platform N2400-8021. Platforms N2400-8011 and N2400-8021 can also be used on the Starlab Orbital Shaker (N2400-8030) . 2-year warranty.

Technical specifications

	3D ROCKING SHAKER	ROCKING SHAKER
Speed range	10 – 70 rpm	10 – 70 rpm
Type of movement	3D mixing	See-saw rocking
Tilt angle	9 °	9 °
Maximum load	5.0 kg	10 kg
Platform dimensions	300 x 300 mm	300 x 300 mm
Operation	Two: continuous or timer	Two: continuous or timer
Timing capacity	1 – 1199 mins (19 hrs 59 secs)	1 – 1199 mins (19 hrs 59 secs)
Display	LCD	LCD
Permissible ambient temperature	4 – 40 °C	4 – 40 °C
Permissible relative humidity	< 80 %	< 80 %
Maximum power consumption	50 W	40W
Power supply	100 – 240 V, 50/60 Hz	100 – 240 V, 50/60 Hz
Weight	9.0 kg	9.0 kg
Dimensions (W x D x H)	370 x 420 x 200 mm	370 x 420 x 106 mm


Magnetic Stirrer.





MAGNETIC STIRRER

Economical magnetic stirrer that is easy to use and built to last. Provides reliable stirring with the adjustable stirring speed. This compact stirrer can hold up to 3 litres and is ideal for applications such as buffer preparation.

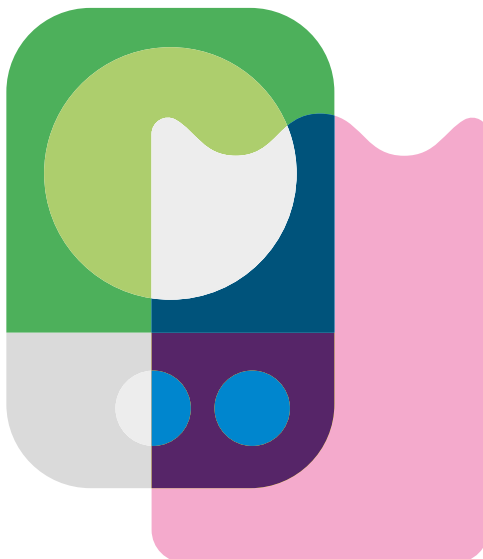- Variable speed range up to 1500 rpm
- Stirring volume up to 3 litres
- Compact design
- Easy to clean
- Supplied with a 40 mm stir bar



Description		Art. No.
	Magnetic Stirrer	N2400-2010
Accessories		
	Temperature Sensor PT1000 (For use with N2400-3010)	N2400-3011
2-year warranty.		

Technical specifications	
Speed range	100 – 1500 rpm
Speed increments	10 rpm
Maximum stirring volume	3 litres
Plate diameter	135 mm
Temperature range	–
Permissible ambient temperature	4 – 40 °C
Permissible relative humidity	< 80 %
Maximum power consumption	10 W
Power supply	100 – 240 V, 50/60 Hz
Weight	0.9 kg
Dimensions (W x D x H)	155 x 215 x 75 mm



Magnetic Stirrer with heating.

MAGNETIC STIRRER WITH HEATING

A magnetic stirrer with very fast temperature ramping and a ceramic-coated plate to ensure an even temperature. Easy to use, the LED display shows temperature and speed. Ideal for many applications such as preparation of solvents at high temperatures.

- Fast temperature ramping saves time
- Speed and temperature LED display
- Hotplate safety warning light
- Chemically-resistant ceramic-coated plate
- Supplied with a 40 mm stir bar



Description	Art. No.
 Magnetic Stirrer with heating	N2400-3010
Accessories	
 Temperature Sensor PT1000 (For use with N2400-3010)	N2400-3011
2-year warranty.	

Technical specifications	
Speed range	200 – 1500 rpm
Speed increments	10 rpm
Maximum stirring volume	3 litres
Plate diameter	135 mm
Temperature range	Ambient to 280 °C (1 °C increments)
Permissible ambient temperature	4 – 40 °C
Permissible relative humidity	< 80 %
Maximum power consumption	515 W
Power supply	200 – 240 V, 50/60 Hz
Weight	1.4 kg
Dimensions (W × D × H)	155 x 215 x 75 mm

Four-Channel Timer / Clock.



TIMING IS EVERYTHING!

Timer/Clock with a large easy to read LED display. There are four channels on which cycles can be independently or simultaneously set. You can easily toggle between your pre-set channels and the clock, so you can keep on top of your experiments, or know when it's time for lunch!



- Allows four different timings simultaneously
- Alarm auto switch-off saves battery life
- Convenient bench stand and magnetic strip
- Large, easy to read display

NEED A CALIBRATED TIMER?

Simply order the pre-calibration of the Timer (C0003-0000) on the same Purchase Order as your new Timer (N9900-0001).

We will then know to calibrate the Timer prior to shipping, and will send the Timer to you with its Certificate of Calibration.

 starlab.click/timer

Description		Art. No.
	Four Channel Timer / Clock	N9900-0001
	Calibration of Four Channel Timer / Clock	C0003-0000
To receive the Timer pre-calibrated, you must order the Calibration (C0003-0000) on the same Purchase Order as your new Timer. 1-year warranty.		

Technical specifications	
Timing capacity	99 hours, 59 mins, 59 seconds
Timer	Count down / count up
Alarm	Audible (for 1 minute at end of cycle)
Clock	12 hour / 24 hour
Operating modes	4
Power	2 x LR44 batteries (included)
Dimensions (W x D x H)	73 x 13 x 59 mm

-86° C Underbench Freezer.

AND CHILL! AT LAST, A SMALL LAB FREEZER THAT'S AFFORDABLE

Store your samples in this space saving, eco-friendly unit directly under your lab bench.

This freezer is a great choice if you are looking for a small, energy efficient freezer with a great storage capacity. The freezer is compatible with a range of storage boxes and racks. To utilise storage capacity to the full, use one of the specially made stainless steel racks. The racks (available separately) fit perfectly inside the freezer and are available to hold 50 mm, 75 mm or 100 mm high storage boxes with a standard 133 x 133 mm footprint.

Description	Art. No.
 Underbench Freezer	N2700-1000
Accessories	
 U100 Rack for 50 mm High Boxes, 74 places	N2700-1001
 U100 Rack for 75 mm High Boxes, 45 places	N2700-1002
 U100 Rack for 100 mm High Boxes, 33 places	N2700-1003

2-year warranty.

 starlab.click/underbench-freezer

Technical specifications	
Temperature range	-60 °C to -86 °C
Power supply	220 – 240 V, 50 / 60 Hz
Weight	60 kg
Ext. dimensions (W x D x H)	595 x 690 x 825 mm (incl. condensor & handle) 595 x 630 x 825 mm (incl. condensor)
Net volume	91 litres
Power consumption	2,445 kWh / year 6.7 kWh / 24h
Noise level	57 dB
Temperature probe	1/PT 1000
Referant type	HCFC-free, Nature R
USB	Yes
Data connection	MODBUS
Digital controller	XW737K
Data logging	35,500 entries
High/low temperature alarm	Yes
Defrost	Manual
Battery back-up	48 hour
Adjustable shelves	Yes (2)
Handle lock	Yes



- Use as your personal -80 °C storage place
- Reduces heat and noise in your laboratory
- Ergonomic handle
- USB port for temperature logger
- No filter - maintenance free!
- 48-hour battery backup



Shelving.
U100 Freezer is supplied with two shelves.



Stainless Steel Racking.
U100 Freezer shown with racking and storage boxes (sold separately) to utilise storage capacity perfectly!

ErgoOne® manual pipettes.




COMFORT AND STYLE: YOU CAN HAVE BOTH!

Lightweight and easy to use, ErgoOne® can be trusted to provide accurate and precise pipetting all day, every day. ErgoOne® pipettes* are engineered to be compatible with all popular pipette tips, without any loss of accuracy or precision.

Lightweight and easy to use, ErgoOne® can be trusted to provide accurate and precise pipetting all day, every day. Use with Starlab's TipOne® pipette tips for the perfect pipetting partnership. ErgoOne® pipettes* are engineered to be compatible with all popular pipette tips, without any loss of accuracy or precision. ErgoOne® pipettes are sold with a 3-year warranty.

*excluding 5.0 ml.



WATCH VIDEO

ERGOONE® FEATURES

- Minimal operating forces
- Lightweight ergonomic design
- Colour coded
- Volume lock
- Universal tip fit*

 starlab.click/manualpipettes



 starlab.click/starterpacks



WATCH VIDEO

ErgoOne® starter packs.
For the perfect pipetting partnership.

FOR YOUR NEW PIPETTING EXPERIENCE

ErgoOne® is setting the new standard in pipetting. Alongside Starlab's trusted TipOne® pipette tips, the pair creates the perfect pipetting partnership. Three different Starter Packs are available. Just choose the pipette volumes you need, and get ready to start something great in your lab.



ErgoOne® E electronic pipettes.

FIVE OPERATING MODES

- 1. Pipetting:** A previously set volume is aspirated into the pipette tip and then discharged.
- 2. Reverse Pipetting:** Program especially for pipetting liquids with a high viscosity or vapor pressure or those that tend to foam.
- 3. Mixing:** The sample is repeatedly aspirated and discharged.
- 4. Dispense:** An aspirated volume is dispensed repeatedly in defined steps.
- 5. Electrophoresis*:** A predefined sample volume is aspirated at high, adjustable speed and then slowly discharged.

* GEL mode is not available for ErgoOne® E 1000 µl, 1250 µl and 5000 µl.

ERGOONE® E FEATURES

- Reliable
- Lightweight, ergonomic design
- Adjustable finger rest
- Significantly reduced tip loading and ejection forces
- Universal tip fit



starlab.click/electronicpipettes



ErgoOne® FAST Pipette Controller

EFFICIENT PIPETTING

During the development of the ErgoOne® FAST pipette controller, a high pipetting speed was recognised as an important feature.

The result is convincing!

The ErgoOne® FAST can fill a 25 ml pipette in less than 4 seconds!

ERGONOMY MEETS MODERNITY

Every aspect of the ErgoOne® FAST has been developed with ergonomics in mind. ErgoOne® FAST is one of the lightest pipette controllers on the market. It is designed for comfort and balances perfectly in the hand for long, fatigue-free pipetting.

ERGOONE® FAST FEATURES

- Pressure responsive speed control
- Fast pipetting with maximum precision
- Low operating forces
- Ergonomic, lightweight design



starlab.click/pipettecontroller





T: +49 (0)40 675 99 39 0
info@starlab.de
www.starlab.de



T: +44 (0)1908 283800
info@starlab.co.uk
www.starlab.co.uk



T: +33 (0)1 60 13 71 70
info@starlab.fr
www.starlab.fr



For our international
dealers, please go to
starlab.click/distributors



T: +39 (0)2 7020 1040
info@starlab.it
www.starlab.it



T: +41 56 6645 980
info@starlab.ch
www.starlab.ch

Passionate for science.



WATCH VIDEO



BUSY LAB DAYS, BUT YOU'RE EQUIPPED FOR SUCCESS.

Starlab laboratory equipment is designed for repeated daily use across a range of laboratory applications. Our equipment is designed to be robust, reliable, easy to use and easy to maintain. User convenience, great features and a small footprint is at the heart of our design process. Discover our range of benchtop equipment for the lab, and equip yourself for success.



starlab.click/equipment